

Rim Locks - Standard Security

Cylinder Roller Bolt Deadlock

1158/L1158

Application:

- For timber doors from 35 to 60mm thick, hinged on the left or right and opening inwards only
- Concealed fixing
- Not recommended for glass panelled doors
- Also suitable for steel and composite doors - special fixings required

Operation:

- The roller bolt operates with a simple push / pull action
- The roller bolt may be locked or withdrawn by key outside and handle inside

Specification:

Reference	1158, L1158 (Lock case only)
Backset	60mm
Case & Keep	Zinc
Roller Bolt	Anodised Brass finish with nylon roller
Handle	Zinc, finished to match case and keep material
Outside Cylinder	Brass, 5 pin tumbler mechanism
Inside Cylinder	n/a
Keying Groups	May be supplied to pass, differ & master keyed. Supplied with 2 steel nickel plated keys as standard. Masterkeyed products supplied with nickel silver keys
Key Blank Number	KB8-NP

Packaging:

- Available Boxed or Visi Packed
- * boxed only



Finish shown: CH-CH

Finishes:

Case only:

CG*; EB*; SC*; WE*;
CH*; DMG*

Case-Cylinder:

CG-PL*; CG-SC*; EB-PL*;
SC-SC; WE-PL*; WE-SC*;
CH-CH; DMG-CH

Standards:




Ordering Code Example:

J 1158 - CG - PL

(Boxed - Product Code - Finish - Cylinder Finish)

Y 1158 - CH - CH

(Visi Packed - Product Code - Finish - Cylinder Finish)

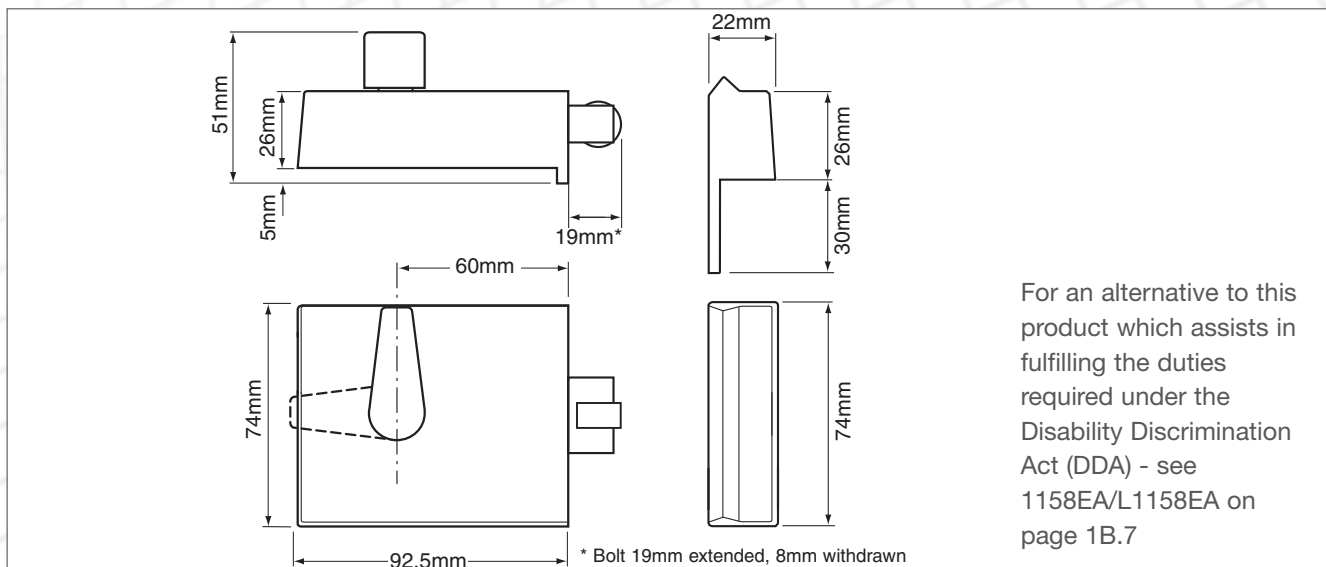

For an alternative to this product which assists in fulfilling the duties required under the Disability Discrimination Act (DDA) - see 1158EA/L1158EA on page 1B.7