Rim Locks - Security



Narrow Stile Drawback Lock

1334

Application:

- For timber doors from 35 to 60mm thick, hinged on the left or right and opening inwards only
- Suitable for glass panelled doors
- Also suitable for steel and composite doors special fixings required

Operation:

- The deadbolt is double thrown, locked or unlocked by key from either side
- The latch bolt is withdrawn by key outside and handle
- The latch bolt may be held in by rotating handle

Specification:

1334 Reference **Backset** 50mm Case & Keep Zinc

Deadbolt Anodised Brass finish Latch Bolt Anodised Brass finish Handle Aluminium, finished to match case and keep material

Outside Cylinder Inside Cylinder **Keying Groups**

Brass, 5 pin tumbler mechanism Brass, 2 pin tumbler mechanism May be supplied to pass and

master keyed, Supplied with 3 steel nickel plated keys as standard. Masterkeyed products

supplied with nickel silver keys

Key Blank Number KB502

Packaging:

- Available Boxed or Visi Packed
 - * boxed only



Finishes:

Case only:

Only supplied complete with cylinder

Case-Cylinder:

CG-PL; CG-SC*; EB-PL; SC-SC; WE-PL*; WE-SC*; CH-CH;

Standards:




Ordering Code Example:

J 1334 - CG - PL

(Boxed - Product Code - Finish - Cylinder Finish)

Y 1334 - EB - PL

(Visi Packed - Product Code - Finish - Cylinder Finish)

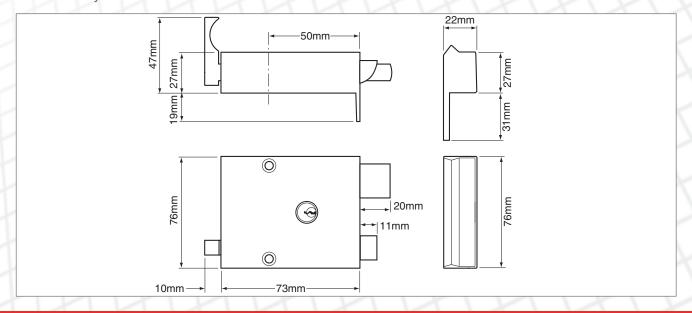

Security