

Standard Stile Cylinder Night Latch 1028/L1028

Application:

- For timber doors from 35 to 60mm thick, hinged on the left or right and opening inwards. See variants for doors opening outwards
- Concealed fixing
- Not recommended for glass panelled doors
- Also suitable for steel and composite doors - special fixings required

Operation:

- The bolt is withdrawn by key outside and handle inside
- The bolt may be held in the locked or in the withdrawn position by operating the snib

Specification:

Reference	1028, L1028 (Lock case only)
Backset	60mm
Case & Keep	Zinc
Latch Bolt	Anodised Brass finish
Handle	Zinc, finished to match case and keep material
Outside Cylinder	Brass, 5 pin tumbler mechanism
Inside Cylinder	n/a
Keying Groups	May be supplied to pass, differ & master keyed. Supplied with 2 steel nickel plated keys as standard. Masterkeyed products supplied with nickel silver keys
Key Blank Number	KB8-NP

Variants:

- 10283 - For doors opening outwards (supplied with striking plate instead of staple)

Packaging:

- Available Boxed or Visi Packed
*boxed only



Finishes:


1028: Case only:	CG*; EB*; SC*; WE*; CH*; DMG*	Case-Cylinder:	CG-PL; CG-SC; EB-PL; SC-SC; WE-PL*; WE-SC*; CH-CH; DMG-CH
10283: Case only:	Only supplied complete with cylinder	Case-Cylinder:	CG-PL*; EB-PL*; WE-SC*; WE-CH*; WE-PL*

Standards:



Ordering Code Example:

J 1028 - CG - PL
(Boxed - Product Code - Finish - Cylinder Finish)
Y 1028 - CH - CH
(Visi Packed - Product Code - Finish - Cylinder Finish)

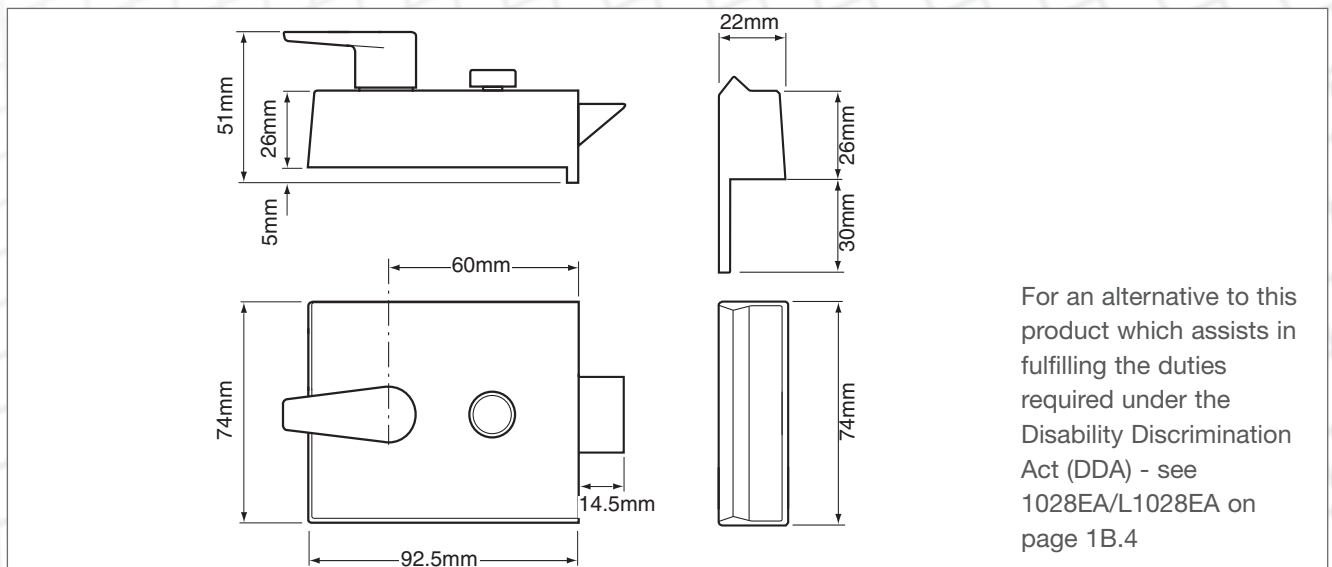

For an alternative to this product which assists in fulfilling the duties required under the Disability Discrimination Act (DDA) - see 1028EA/L1028EA on page 1B.4