

BS 5 Lever & 5 Lever Mortice

5 Lever BS 3621:2007 Mortice Sash Lock 2234E

Application:

- For timber doors hinged on the left or right and requiring key and lever handle operation
- Keys are suitable for doors up to 54mm thick

Operation:

- Deadbolt locked or unlocked by key from either side
- Latch bolt withdrawn by lever handle from either side
- Extended 20mm deadbolt for secure positive deadlocking and additional resistance against attack
- 2234E may be keyed alike with 2134E
- Pierced to accept bolt through furniture

Specification:

Reference	2234E (BS 20mm throw)
Case Size	67mm (2.5") or 79.5mm (3")
Backset	45mm or 57.5mm
Case	Steel, red powder coat
Forend	Stainless steel or brass
Striking Plate	Security box type, finished to match forend
Deadbolt	Brass, with hardened steel rollers
Latch Bolt	Brass, reversible
Follower	Brass, 8mm square
Rebate Kit	2964 (13mm, 19mm or 25mm)
Keying Groups	Supplied to pass, differ and keyed alike. Supplied with 3 steel nickel plated keys
Key Blank Number	KB430

NB: Not suitable for master keying

Features:

- Reversible latch bolt from outside of case
- Anti-pick and anti-saw security features
- Available with square forend and striking plate
- 20mm bolt throw



Finishes:

- SC - Satin Chrome finish
- PL - Brass finish

Standards:

- Tested to BS3621:2007



- EN 1634-1 assessed for use on 60 minutes timber fire doors



- EC Certificate number: 0832-CPD-6043


Ordering Code Example:

J - 2234E - PL - 2.50

(Boxed - Product Code - Finish - Case Size)

Y - 2234E - PL - 2.50

(Visi Packed - Product Code - Finish - Case Size)

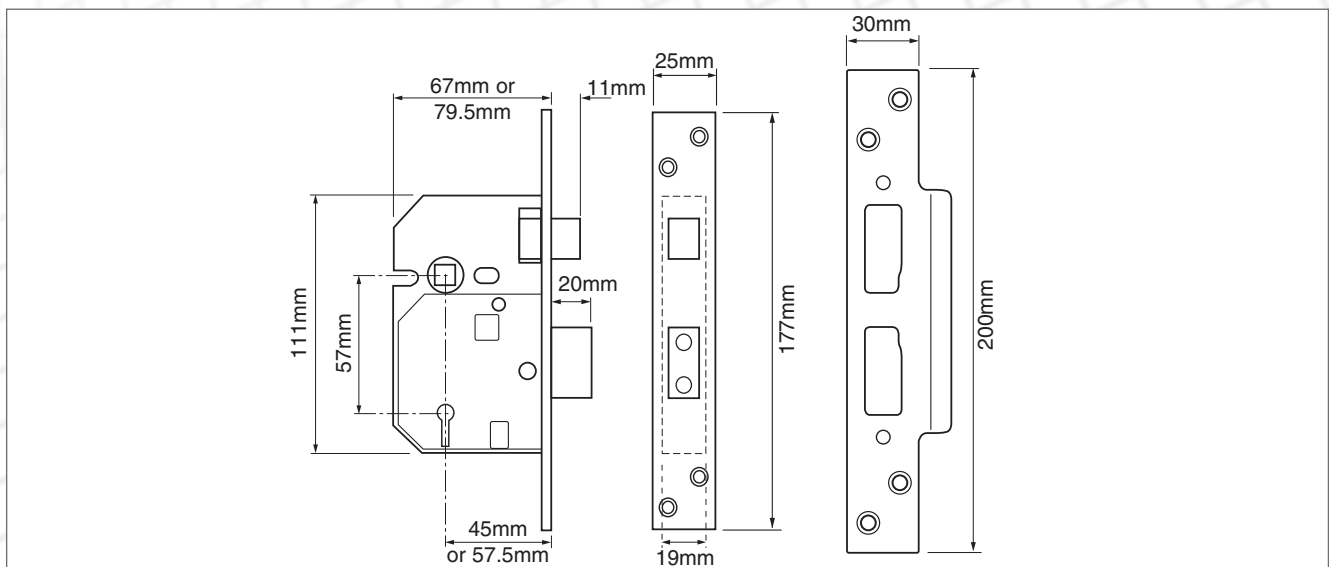

2F BS 5 Lever and 5 Lever Mortice