

Euro Profile Escape Mortice Lock - outward opening "Green Lock" L224405 L224406

Application:

- For timber doors hinged on the left or right, requiring a single action escape function on the inside
- Also suitable for steel & composite doors - special fixings required
- Suitable for outward opening doors

Operation:


- Deadbolt locked or unlocked by euro profile cylinder from outside or by key or turn from inside
- Latch bolt withdrawn by lever handle from either side
- Deadbolt and latch bolt withdrawn simultaneously by inside lever handle

Specification:

| | |
|----------------|---|
| Reference | L224405 - left hand L224406 - right hand |
| Case Size | 79.5mm (3") |
| Backset | 57.5mm |
| Case | Steel, green powder coat |
| Outer Forend | Stainless steel or brass |
| Striking Plate | Finished to match forend |
| Deadbolt | Brass, with hardened steel rollers |
| Latch Bolt | Brass |
| Follower | Brass, 8mm square |
| Rebate Kit | 2968 (13mm, 19mm or 25mm) |
| Cylinder Type | Euro profile (not supplied) |

Features:

- Available with square forend and striking plate
- Split follower lock requires special furniture: 630-15-3

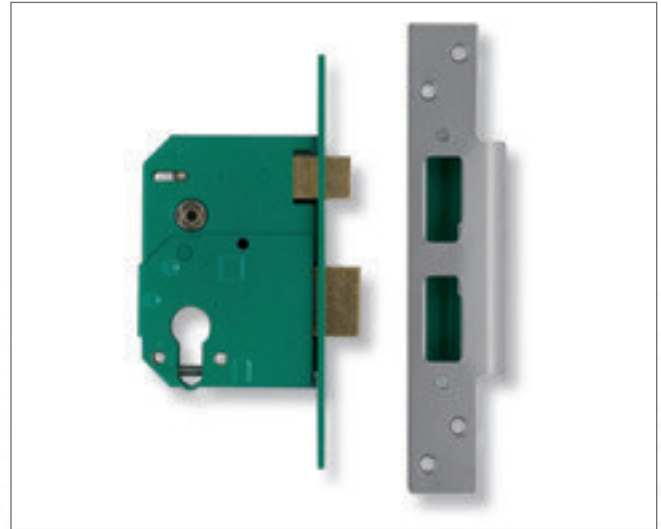

Finishes:

- SC - Satin Chrome finish
- PL - Polished Brass finish


Standards:



- For BS EN179 and CE compliance see set on page 9B.6
- EN 1634-1 assessed for use on 60 minutes timber fire doors

Ordering Code Example:

J L224405 - PL
(Boxed - Product Code - Finish)

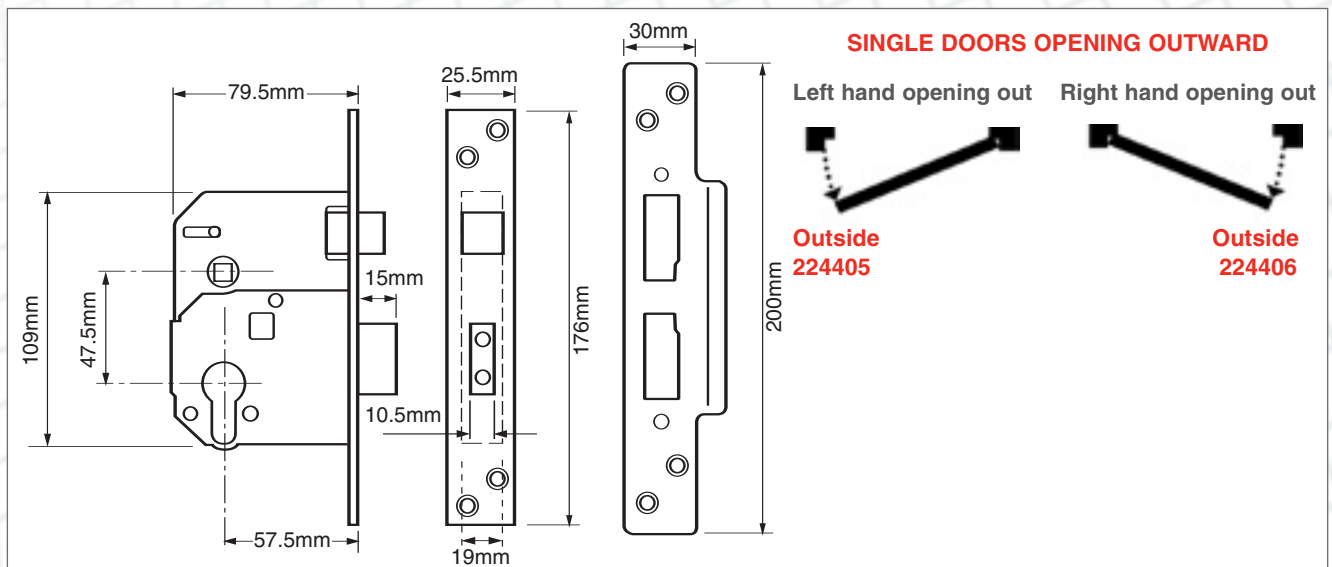

2D Euro Profile Mortice